

Tempra® Series Tankless Electric Water Heaters

› For whole house or multiple point-of-use

Features

- › On-demand, continuous and unlimited supply of hot water
- › High limit switch with manual reset
- › All models equipped with exclusive Electronic Temperature Control that ensures steady output temperature even with varying flow rates
- › Exclusive design prevents dry firing
- › Electronic switch activated for virtually silent operation
- › 7 year leakage/3 year parts warranty
- › Copper sheathed heating element housed in copper cylinder
- › 99% efficiency
- › Cold water only line needed to be run to lavatory
- › Seismic proof construction
- › Tankless design prevents Legionella bacteria growth
- › No standby heat loss with tankless design
- › Easy installation 3/4" NPT connections
- › No T & P relief valve needed (Check local code)




Tempra® Plus models are equipped with Tempra Advanced Flow Control™, which was invented by Stiebel Eltron. No other manufacturer of tankless electric water heaters has anything like it. If the demand is greater than the unit can handle, Tempra Advanced Flow Control™ slightly reduces the flow of water to maintain delivery of hot water at the set point. Regular Tempra® units ("B" models) do not have this feature.

Model Specifications

Model	Voltage	Phase	kW	Amps	Circuit Breaker	Wire Size	Temperature Rise °F (gpm = kW x 6.83 / Δt)			
							1.5 gpm	2.25 gpm	3.0 gpm	4.5 gpm
Tempra® 12/12 Plus	240 V	single	12	50	50	6 AWG	54	36	27	-
	208 V	single or unbalanced 3-phase	9	44	50	6 AWG	41	27	20	-
Tempra® 15/15 Plus	240 V	single	14.4	2 x 30	2 x 30	10 AWG	65	43	33	-
	208 V	single or unbalanced 3-phase	10.8	2 x 26	2 x 30	10 AWG	49	33	25	-
Tempra® 20/20 Plus	240 V	single	19.2	2 x 40	2 x 40	8 AWG	88	58	44	29
	208 V	single or unbalanced 3-phase	14.4	2 x 35	2 x 35	8 AWG	65	43	33	22
Tempra® 24/24 Plus	240 V	single	24	2 x 50	2 x 50	6 AWG	92	73	54	37
	208 V	single or unbalanced 3-phase	18	2 x 44	2 x 50	6 AWG	82	54	41	27
Tempra® 29/29 Plus	240 V	single	28.8	3 x 40	3 x 40	8 AWG	92	87	66	44
	208 V	single or balanced 3-phase	21.6	3 x 35	3 x 35	8 AWG	92	66	49	33
Tempra® 36/36 Plus	240 V	single	36	3 x 50	3 x 50	6 AWG	92	92	82	55
	208 V	single or balanced 3-phase	27	3 x 44	3 x 50	6 AWG	92	82	61	41

Tempra® Model	12 / 12 Plus	15 / 15 Plus	20 / 20 Plus	24 / 24 Plus	29 / 29 Plus	36 / 36 Plus
Part number	223420 / 224196	223421 / 224197	223422 / 224198	223424 / 224199	232885 / 223425	232886 / 223426
Weight (lbs / kg)	13.5 / 6.1	16.1 / 7.3	16.1 / 7.3	16.1 / 7.3	19.0 / 8.6	19.0 / 8.6
Min. flow to activate (gpm / l/min)	0.37 / 1.4	0.50 / 1.9	0.50 / 1.9	0.50 / 1.9	0.77 / 2.9	0.77 / 2.9
Operating Pressure	Min. 30 psi, Max. 150 psi					
Dimensions (in. / cm)	WIDTH 16 5/8" / 42.0 cm x HEIGHT 14 1/2" / 36.9 cm x DEPTH 4 5/8" / 11.7 cm					
Cover Material and Color	Gray Metal					

Dimensions

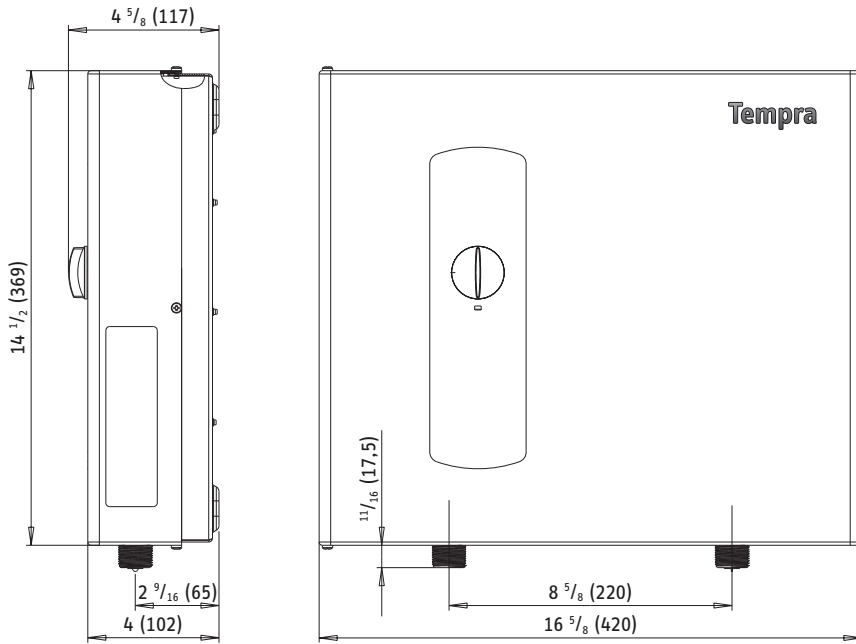


Intertek

Certified to ANSI/UL Std. 499
Conforms to CAN/CSA E335-1 & E335-2-35



Tested and certified
by WQA against NSF/
ANSI 372 for lead free
compliance.

› Tempra® tankless electric water heaters are suitable for whole house or multiple point-of-use applications.

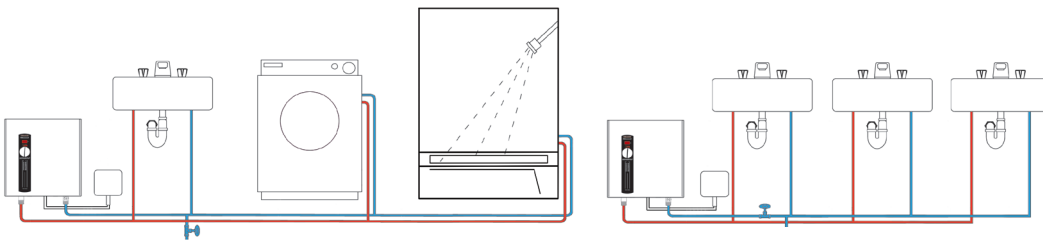

› Tempra® tankless electric water heaters are suitable for booster applications, accepting a maximum incoming water temperature of 131°F/55°C.

Specification

The tankless electric water heater shall be equipped with several copper sheathed heating elements housed in copper cylinders. The number of heating elements shall be three in the case of the 12 kW unit, four in the case of the 14.4 kW and 19.2 kW units, six in the case of the 24 kW and 28.8 kW units and nine in the case of the 36 kW unit. Each copper cylinder that houses heating elements shall be equipped with a dedicated single pole bimetal type high limit that is attached to the top dome of the cylinder. These safety high limit switches shall have a manual reset that interrupts power at 185°F. The heating elements shall be controlled by a number of triacs (power transistors) that are soldered into the circuit board and cooled by the incoming cold water. The unit shall be equipped with a flow sensor with a miniaturized turbine that feeds the water flow rate information into the main circuit board. The output temperature shall be adjustable between 86°F and 140°F via a knob that is positioned on the front cover. The water connections shall be designed for 3/4" NPT flex hose connectors. The housing shall be made of a powder coat painted steel and the front cover shall be hinged on the left side of the housing. Tempra® Plus models shall be equipped with Advanced Flow Control™ to automatically adjust the flow of water to ensure a constant output temperature, even if demand exceeds capacity. The unit shall conform to ANSI ANSI/UL Std. 499 and be certified to CAN/CSA E335-1 & E335-2-35.

Engineer/Architect _____	Date _____		
Job Name/Customer _____	Location _____		
Contractor _____	Representative _____		
Qty	kW	Voltage	Amps
Tempra® model _____			

rev. 2015.8 Due to our continuous process of engineering and technological advancement, specifications may change without notice.